



Choose 2 Rent

Phone 1 (800) 622-6484

Fax 1 (866) 937-8254

info@choose2rent.com

www.choose2rent.com


version C2R-1 2018

TP Link Archer C7 Advanced Configuration

Enable/Disable 2.4GHz

Interface Version 2/3

1. Connect your laptop to LAN port 1-4 or WiFi SSID www.choose2rent.com
2. (optional) Connect iPad to WiFi SSID www.choose2rent.com
3. Open a web browser and enter tplinklogin.net or 192.168.0.1
4. At the login page enter User: admin | Password: admin
5. On the left panel select Dual Band Selection

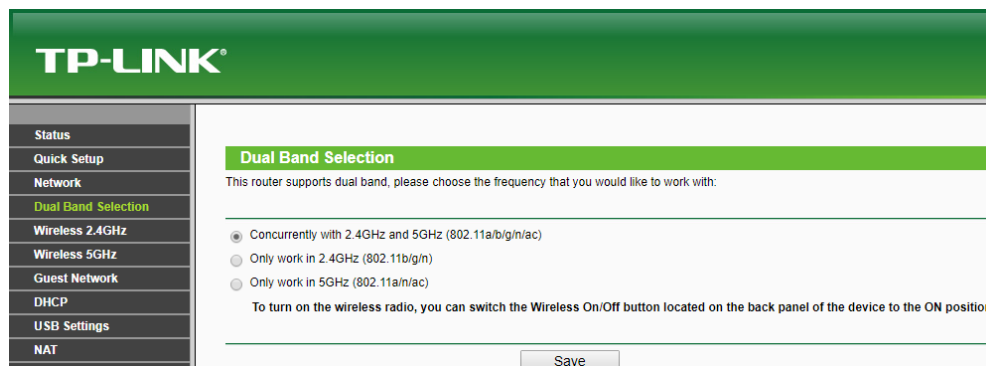

6. Select 2.4GHz or Concurrently with 2.4GHz and 5GHz
7. Press SAVE at the bottom (setting will not take place until you restart the router)
8. Once Router reboots, log back in and select Wireless 2.4GHz on the left panel
9. Confirm Wireless network Name (you may change to copy www.choose2rent.com)
10. Select Wireless Security on the left panel
11. Ensure PSK Password matches Event001
 1. Press SAVE at the bottom (setting will not take place until you restart the router)

Interface Version 4+

1. Connect your laptop to LAN port 1-4 or WiFi SSID www.choose2rent.com
2. (optional) Connect iPad to WiFi SSID www.choose2rent.com
3. Open a web browser and enter tplinklogin.net or 192.168.0.1



4. At the login page enter User: admin | Password: admin
5. On the left panel select Wireless

The screenshot shows the TP-Link Basic configuration page for Wireless Settings. The left sidebar has 'Wireless' selected. The main content area has two sections: '2.4GHz Wireless' and '5GHz Wireless'. Both sections have 'Enable Wireless Radio' checked. The 2.4GHz section has 'Network Name (SSID)' set to 'TP-Link_593D' and 'Hide SSID' unchecked. The 5GHz section has 'Network Name (SSID)' set to 'TP-Link_593D_5G' and 'Hide SSID' unchecked. A 'Save' button is at the bottom right.

6. Check the box next to Enable Wireless Radio
7. Confirm Wireless network Name (you may change to copy www.choose2rent.com)
8. Ensure Password matches Event001
9. Press SAVE (setting will not take place until you restart the router)

Set Static WAN IP

Interface Version 2/3

1. Connect your laptop to LAN port 1-4 or WiFi SSID www.choose2rent.com
2. (optional) Connect iPad to WiFi SSID www.choose2rent.com
3. Open a web browser and enter tplogin.net or 192.168.0.1
4. At the login page enter User: admin | Password: admin
5. On the left panel select Network

The screenshot shows the TP-Link WAN configuration page. The left sidebar has 'Network' selected, and 'WAN' is highlighted. The main content area is titled 'WAN' and shows 'WAN Connection Type' set to 'Static IP'. Below this are fields for 'IP Address', 'Subnet Mask', and 'Default Gateway', all set to '0.0.0.0'. There is also a field for 'MTU Size (in bytes)' set to '1500'. At the bottom, there are fields for 'Primary DNS' and 'Secondary DNS', both set to '0.0.0.0'. A 'Save' button is at the bottom.



6. Change the WAN Connection Type drop down from Dynamic IP to STATIC IP
7. Enter the values provided by your Internet Service provider
8. Press SAVE (setting will not take place until you restart the router)

Interface Version 4+

1. Connect your laptop to LAN port 1-4 or WiFi SSID www.choose2rent.com
2. (optional) Connect iPad to WiFi SSID www.choose2rent.com
3. Open a web browser and enter tplogin.net or 192.168.0.1
4. At the login page enter User: admin | Password: admin
5. On the left panel select Internet

The screenshot shows the TP-Link web interface for the Internet settings. The 'Basic' tab is selected. The 'Internet Connection Type' is set to 'Static IP'. The IP Address is 1.1.1.2, Subnet Mask is 255.255.255.0, Default Gateway is 2.2.2.2, Primary DNS is 3.3.3.3, and Secondary DNS is 4.4.4.4 (Optional). A 'Save' button is visible at the bottom right.

6. Change the Internet Connection Type drop down from Dynamic IP to STATIC IP
7. Enter the values provided by your Internet Service provider
8. Press SAVE (setting will not take place until you restart the router)

Please call our support team if you need assistance
setting up your rental devices
1(800) 622-6484